


Downpipe clamp compliant to standard and technical regulations

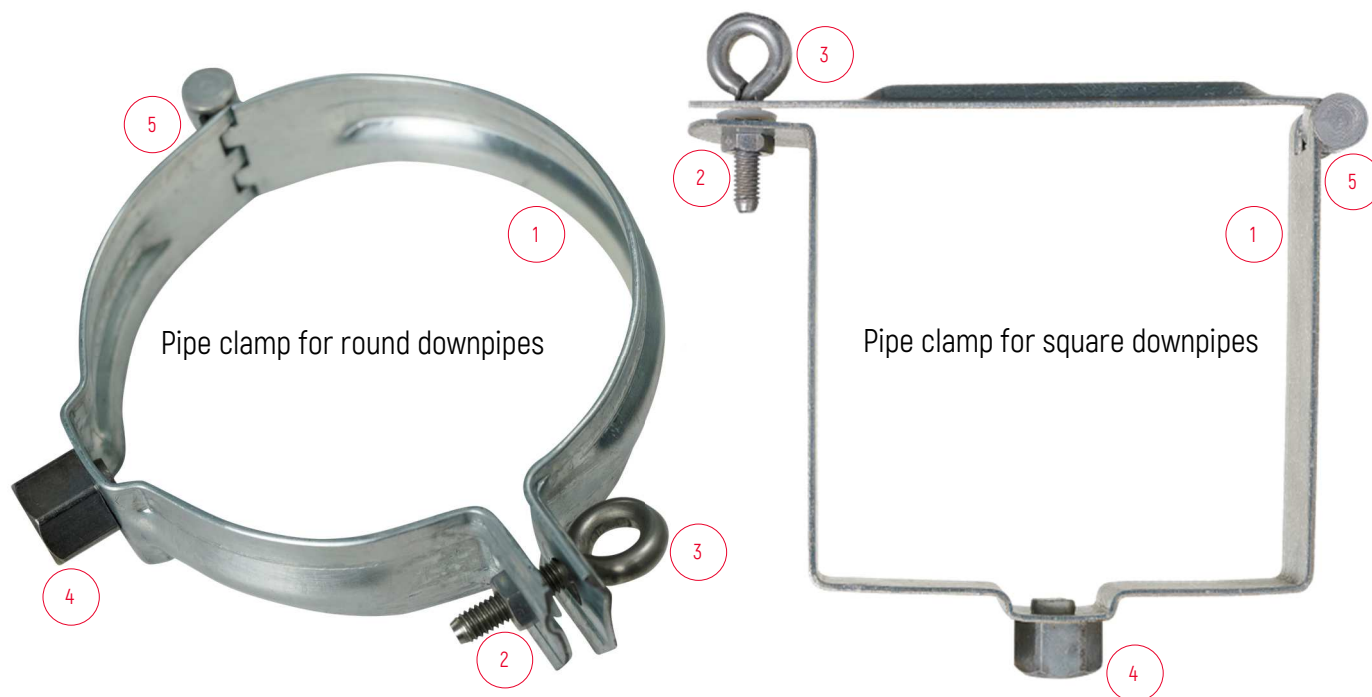

Continuously hot-dip galvanized

Clamp band (1):	29 mm x 1,5 mm, S235JR Z150 (with rounded, corrosion-protected longitudinal edges)
M6 threaded press nut (2):	Steel + Zinc/Nickel coating with at least 4 load-bearing threads
Eye bolt (3):	Stainless steel
M10 threaded press nut (4):	Steel + Zinc/Nickel coating
Hinge pin (5):	Aluminum alloy (fivefold hinge pin for stabilization of the two clamp parts, pin closed on both ends)

Full copper

Clamp band (1):	29 mm x 1,5 mm, copper (SF-CU F 24 nach DIN 17670/1791)
M6 threaded press nut (2):	Copper with at least 4 load-bearing threads
Eye bolt (3):	Copper
M10 threaded press nut (4):	Copper
Hinge pin (5):	Copper (fivefold hinge pin for stabilization of the two clamp parts, pin closed on both ends)